


AOV Pressure Sensor (APS)

Teledyne Test Services offers a full line of pressure sensors for use with the QUIKLOOK II AOV Test System. These highly accurate and ruggedized sensors are used to capture test pressures such as diaphragm, line and supply pressure as well as I/P output pressure and are available in a variety of ranges. All sensors are provided with a mating connector for easy input to QUIKLOOK II Data Acquisition Systems.

Features

- Accuracy 0.10 % of Full Scale
- Wide range available (see below)
- Robust DIN Connector at sensor
- Connects to QUIKLOOK II cable sets or directly to the QUIKLOOK System.

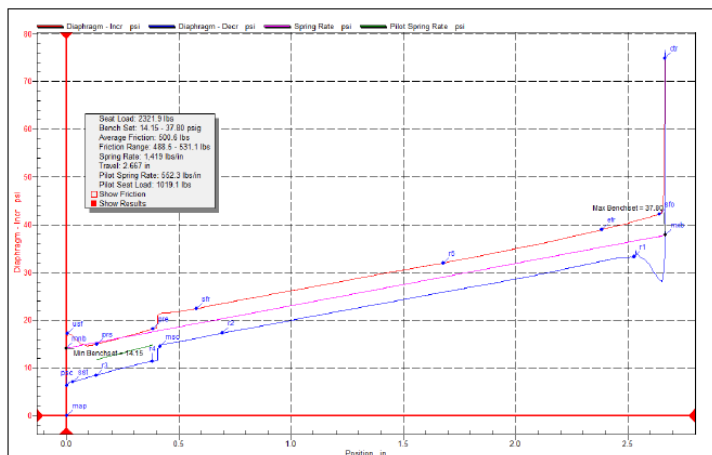

Teledyne **AOV Pressure Sensors** are available in the following ranges:

P/N:	PSIG Range:*
160076-30	0 - 30
160076-50	0 - 50
160076-100	0 - 100
160076-150	0 - 150
160076-200	0 - 200

* Other ranges available upon request