

Pressure Sensor Interface (PSI)




Teledyne Test Services' Pressure Sensor Interface (PSI) offers the AOV tester a convenient package that consolidates six pressure transducers along with position and strain inputs for connection to the QUIKLOOK II System for AOV testing.

Features

- Six Calibrated Pressure Transducers
 - (2) 0 – 30 psig transducers
 - (4) 0 – 100 psig transducers
 - Other Ranges Available
- Strain Connection
- Position Connection
- Integral 15 ft Cable Set
- Accuracy 0.5 % of Full Scale
- Color Coded Cables and Transducers
- Easy Setup

3-LCV-006-0047B - Mechanical Properties - As-Left

03/10/2010 15:51:07 File 10069B10

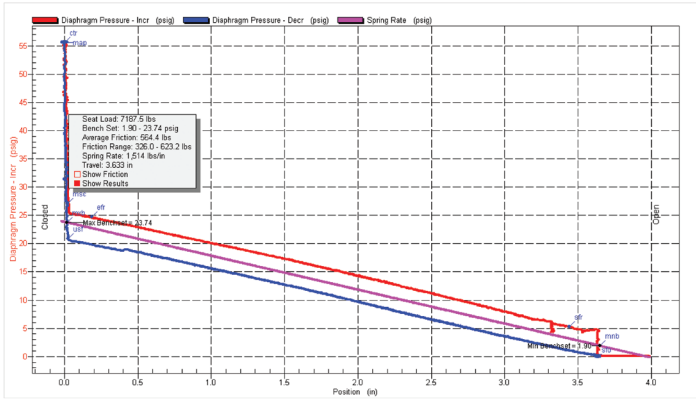

QUIKLOOK II 2010.227 Page 1 of 1
MRNENPC16.dbrail 10/6/2010 8:51:28 AM

The Pressure Sensor Interface (P/N 160078) is used with QUIKLOOK II or QL II+ Systems. Additional accessories include:

P/N	
160079	QSS Adapter Cable (1 – channel)
159187	C Clamp Adapter Cable
160080-15	15-in Stem Position Indicator
160080-30	30-in Stem Position Indicator